VCAMM-012

HDMI Audio Extractor

Specifications

		VCAMM-012
Input		HDMI x 1
Output		HDMI x 1 Analog Stereo x 1 S/PDIF x 1
HDMI Audio Format		PCM 2 / 5.1 / 7.1, Dolby 5.1, DTS 5.1, D-TrueHD, DTS-HD
Slide Switch	Audio Out	2ch , S/PDIF , HDMI
LED Indicator		Power / System Status (Multi-Color)
Video Resolution (max.)		Full HD 1080p (1920 x 1080)
HDMI TMDS Clock Rate (Max.)		225 MHz
Power Consumption		DC 5V, 550mA
Dimensions H x W x D (mm)		20 x 85 x 58
Weight (g)		150

Features

- Allow to extract audio signals from HDMI source and converts HDMI audio to digital optical or analog stereo.
- Intelligent EDID handling and processing ensures Plug and Play operation
- HDCP Compliant and Blu-ray ready
- HDTV Compatibility
- Compliant with HDMI v1.3 , HDCP 1.2
- Supports up to 24bit resolution digital audio
- Supports 3D signals
- Supports 8 / 10 / 12 bit deep color
- Diversified and flexible audio output selectors allowing users to extract the audio and video sources that are great for conference room presentation, school and corporate training environments
- Multi-color LED Status indicates for easy troubleshooting and monitoring
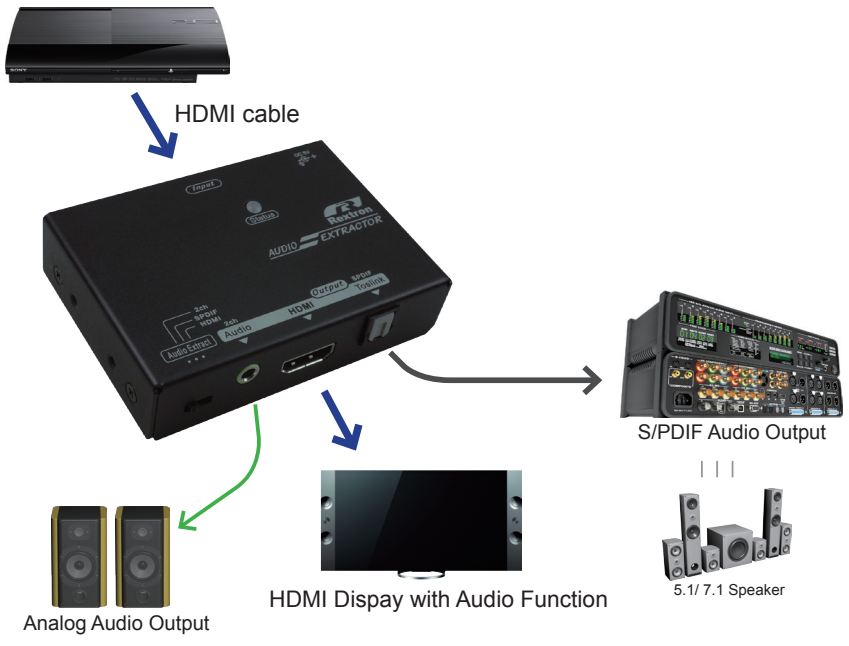
Connection Pattern